

# 三久穀物篩選機

## SUNCUE PRE-CLEANER

穀物先經過粗選，可增加入穀量，加快乾燥速度，省油省電，能更均勻乾燥，減少乾濕粒

Enhance drying evenness, increase loading capacity and drying efficiency.

Power and fuel saving, and reduce uneven moisture.




SPC-50

### 規格 SPECIFICATIONS

項目Item	機型Model	SPC-15	SPC-50
選別方式 Function		風選+篩選 Winnow and Sieve	
適用穀物 Application		稻穀、小麥、大麥、玉米、高粱等 Paddy, Wheat, Barley, Corn, Sorghum etc.	
機台尺寸 Dimension 長x寬x高mm LxWxH mm		2,173x1,853x1,756	2,918x2,370x3,278
空機重量 Net Weight 約公斤 Approx. kg		900	2,200
處理量 Capacity 噸/小時 ton/hr		5~15	20~50
電壓 Voltage		三相3P, 220V/380V/415V/440V, 50/60Hz	
動力 Power Consumption kW, HP		3 , 4	7.87 , 10.5

### 配置圖 PROCESS

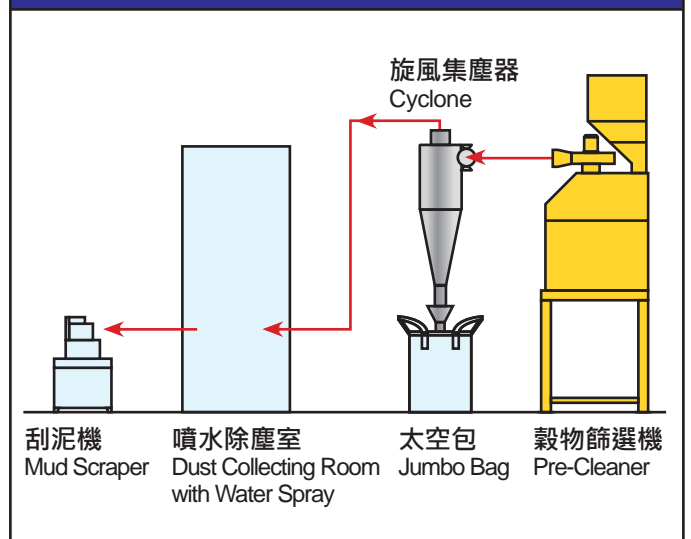

●圖示及規格僅供參考，實際產品規格以客戶簽署訂單及出貨實物為主。●腳架與維修平台、入料斗、出料斗、風管為選配件。●處理量係指日本聯合收割機所收割之穀物。如夾雜率高、含水率高，則無法達上表所列之處理量。  
●The specification and graph are for reference only. Actual specification of SUNCUE product shall be based on the Sales Confirmation which customers sign and delivered products. ●Stand, maintenance platform, inlet hopper, outlet hopper and air pipe are optional. ●The handling capacity is based on using Japanese combine harvester. If impurity rate and moisture content are too high, then the actual handling capacity might be lower than listed.



## 特點 FEATURES

- 可依濕穀品質調整篩選量
- 風選+篩選設計，篩後穀物清潔度高
- 處理量大，雙篩網同步篩選
- 省空間
- 入穀、出穀前後雙風選
- Pre-cleaning speed can be adjusted according to wet grain quality.
- High purity after pre-cleaning thanks to winnowing and sieving.
- Dual screens work simultaneously to increase capacity.
- Saves space.
- Dual winnowing at grain entry and exit.

## 安裝實績 INSTALLATION



韓國 Korea



台灣 Taiwan



菲律賓 Philippines



印尼 Indonesia

**SUNCUE**<sup>®</sup>  
三久股份有限公司  
SUNCUE COMPANY LTD.

412039 台中市大里區仁化路105號  
No. 105, Renhua Rd., Dali Dist., Taichung City 412039, Taiwan, R.O.C.  
☎+886-4-2339-7171 ☎+886-4-2330-2939  
🌐www.suncue.com  
✉sales@suncue.com



服務中心 Service Center